

126 Brookline Ave, 3rd Floor Boston, MA 02215. USA Tel: +1 (617) 566 - 9300

Fax: +1 (617) 249 - 1987

www.grandstream.com








For Certification, Warranty and RMA information, please visit www.grandstream.com





GRP_WM_S GRP_WM_L GRP_WM_C

GRP261x/GRP2650 IP **Phones Series Wall Mount Bracket**

Quick Installation Guide


EN OVERVIEW

This guide provides instructions for mounting your GRP261x series phone to the wall. Provided instructions apply to all GRP261x series models and all GRP_WM bracket models. There are two wall mount bracket models:

- GRP_WM_S for GRP2612/P/W and GRP2613
- GRP WM L for GRP2614, GRP2615 and GRP2616
- GRP WM C for GRP2650

Note: The wall mount bracket is sold separetely (not included in GRP261x series phone package).

PACKAGE CONTENTS




Note: Screws and anchors required for wall mount installation are not included in this package.

ADJUSTING HOOKSWITCH TAB


Make sure to adjust the hookswitch tab position up to hold the handset while the phone is mounted on the wall (tab wih extension down is recommeded for desktop usage).

- 1. Pull out the tab from the handset cradle.
- 2. Rotate the tab to extension up.
- 3. Plug it back into the slot with the extension up.

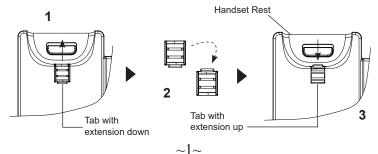

INSTALLING WALL MOUNT BRACKET

- 1. Put the wall mount's ribs into the unit's groove.
- 2. Press this position and install the wall mount.
- 3. The wall mount is installed completely.

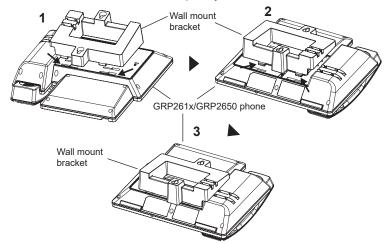

MOUNTING THE PHONE TO THE WALL

- 1. Use the wall mount bracket to mark two vertical dots using "wall mount slots" on the wall where the phone will be installed.
- Using a drill, make a hole on each marked dot. Put a plastic anchor and screw (not provided) on each hole. Leave enough space to attach the wall mount bracket to the wall.
- Mount the GRP261x/GRP2650 phone with wall mount bracket attached to the wall using wall mount slots.

